

Q-3500

One Step Fountain Solution

Designed for presses running conventional or energy-curable inks. It works especially well with energy-curable (UV, LED, H-UV) type.

Q-3500 has multiple desensitizers and calcium inhibitors.

- Helps keep plate wet and lubricated.
- Helps keep piling to a minimum.
- Compatible with all metal plates, conventional, CTP.
- Suitable for all offset inks including UV / EB / HUV.

Direction For Use:

Recommended dosage range - 5 oz. to 8 oz. per gallon.

Recommended dosage range - 3.9% to 6.254%


We recommend starting with 5 oz. / gallon, adjusting dosage up or down as needed.

We recommend starting with 3.9%, adjusting dosage up or down as needed.

pH: 4.8 - 5.0



CONDUCTIVITY/ μ mhos

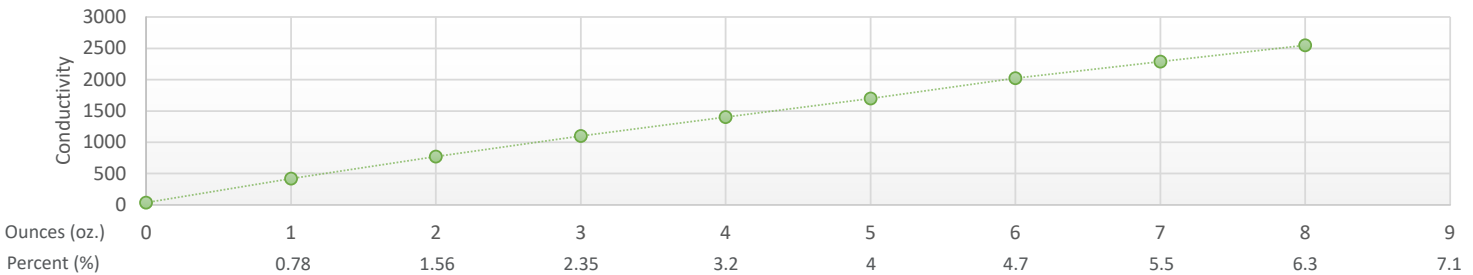

Specifications:

VOC content lb. / gallon	2.7
VOC content grams / liter	320.3
Flashpoint	None
Color	Colorless
CA. Compliant	Yes

Available In:

Product Code	Unit	Case Qty.
020301D	1 Gallon (3.785 ltr)	4
020301E	5 Gallons (18.9 ltr)	Each
020301F	30 Gallons (113.6 ltr)	Each
020301G	55 Gallons (208 ltr)	Each
020301ST	275 Gallons (1040 ltr)	Each



VOC COMPLIANT Air Quality Management District Compliant

