

V-5750

One Step Fountain Solution

With advanced wetting, lubrication & decalcifiers

V-5750 is part of our "V" series of Fountain Solutions. Contains corrosion inhibitors to further protect press parts.

With multiple calcium neutralizers, surfactants and thickeners to keep fount water surface tension low and thicker. More of it stays on non-image area longer.

Performance-enhancing ingredients are incorporated into the formula to prevent problems before they occur.

- Use with porous or non-porous substrates..
- Razor sharp reverses, cleaner screens, improved ink taping, denser solids.
- Excellent wetting and film forming properties.
- Suitable for conventional, UV and HUV inks.
- Compatible with all known plates, conventional, CTP.

Dosage Range: 3.5oz. - 5oz. / gallon.


We recommend starting with 4oz. / gallon, adjusting dosage up or down as needed.



Dosage Range: 2.75% - 4%.

We recommend starting with 3.2%, adjusting dosage up or down as needed.

CONDUCTIVITY/μmhos

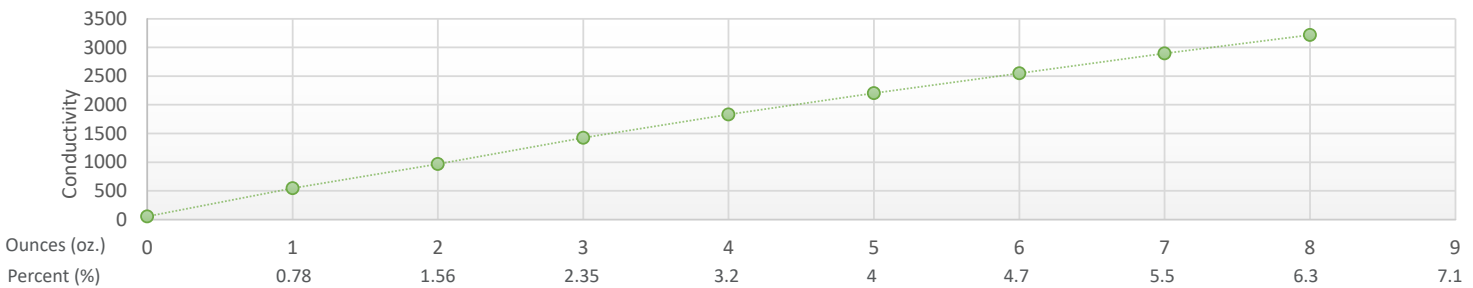

Specifications:

VOC content lb. / gallon	2.1
VOC content grams / liter	250
Flashpoint	None
Color	Colorless
CA. Compliant	Yes

Available In:

Product Code	Unit	Case Qty.
810211GSE	5 Gallons (18.9 ltr)	Each
810211GSG	55 Gallons (208 ltr)	Each
810211GST	275 Gallons (1,040 ltr)	Each



VOC COMPLIANT Air Quality Management District Compliant

